

LED "COMPACT" Light Pockets - Looking to Purchase?

The '6' Basic Rules:

- 1 LED Pockets are supplied in 2x versions = Landscape & Portrait
- 2 The Golden Rule with LED Displays = You can add 1, 2, 3, 4x LEDs - to a maximum of 4 LED's
- 3 Each additional column must have a gap between them (due to the power supply) - minimum recommended is = 150mm
- 4 All the weight is suspended from the ceiling so, solid anchor points are crucial
- 5 If adding several rows of LEDs - then, we could arrange a single 'More Powerful Transformer' - Tel: 01244 470903
- 6 We offer a 'Full Design Service' & 'Installation Service' - Tel: 01244 470903

Index:

Page 1	Measurements
Page 2	Landscape
Page 3	Portrait
Page 4	Fitting Instructions

A0 Portrait - Compact LED's

Width (mm)	Height (mm)	Rod Centres	Weight	Wattage
895	1243	910	30	25





A0 Landscape - Compact LED's

Width (mm)	Height (mm)	Rod Centres	Weight	Wattage
1243	895	1260	30	25



A0 Portrait A0 Landscape - Compact LED's

"LED LANDSCAPE" - Measurements - Reveals 3x Drops of LED's & Total Space Required

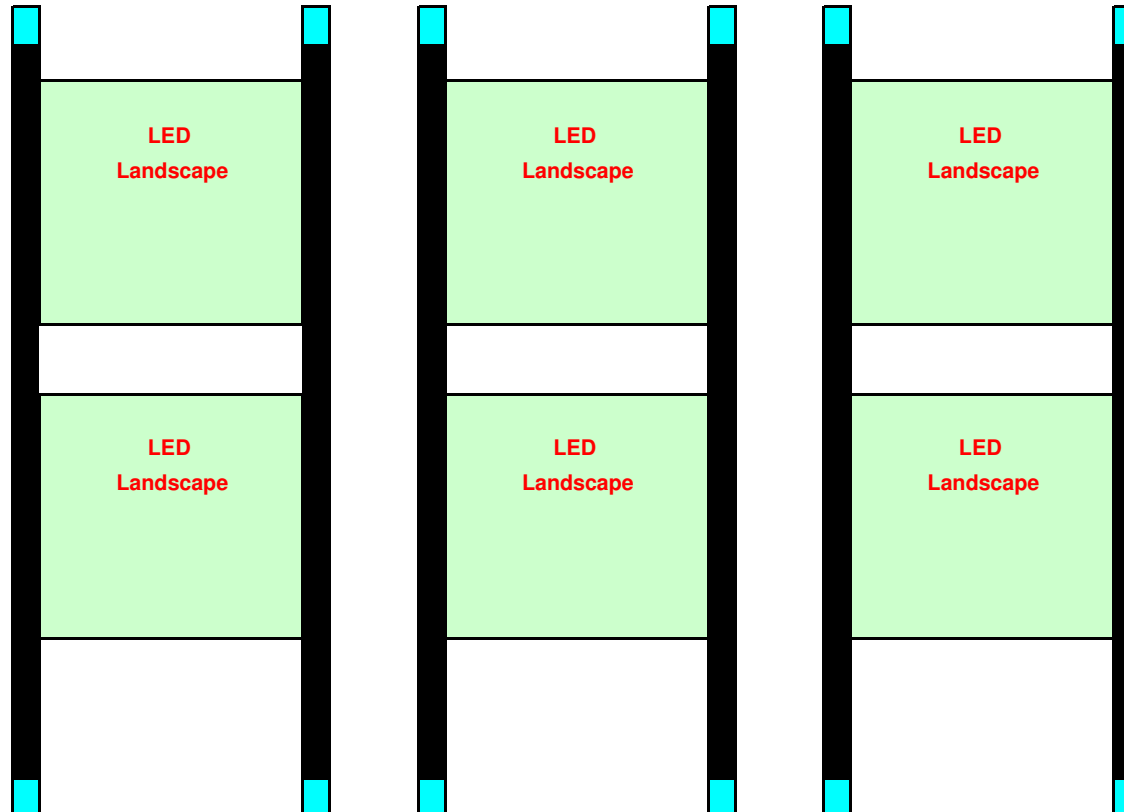

1x Drop	Widths
LED Hardware =	1260 mm
2x End Gaps	300 mm
Central Gap (None)	0 mm
Total Space =	1560 mm


2x Drops	Widths
LED Hardware =	1260 mm
LED Hardware =	1260 mm
2x End Gaps	300 mm
1x Central Gap =	150 mm
Total Space =	2970 mm

3x Drops	Widths
LED Hardware =	1260 mm
LED Hardware =	1260 mm
LED Hardware =	1260 mm
2x End Gaps	300 mm
2x Central Gaps =	300 mm
Total Space =	4380 mm

Note:

Due to weight of each LED (25kgs)
Rods are utilised instead of cables
Each drop will come with 4x 1500mm Rods
LED Grippers, will also be Rod Grippers

"LED PORTRAIT" - Measurements - Reveals 3x Drops of LED's & Total Space Required


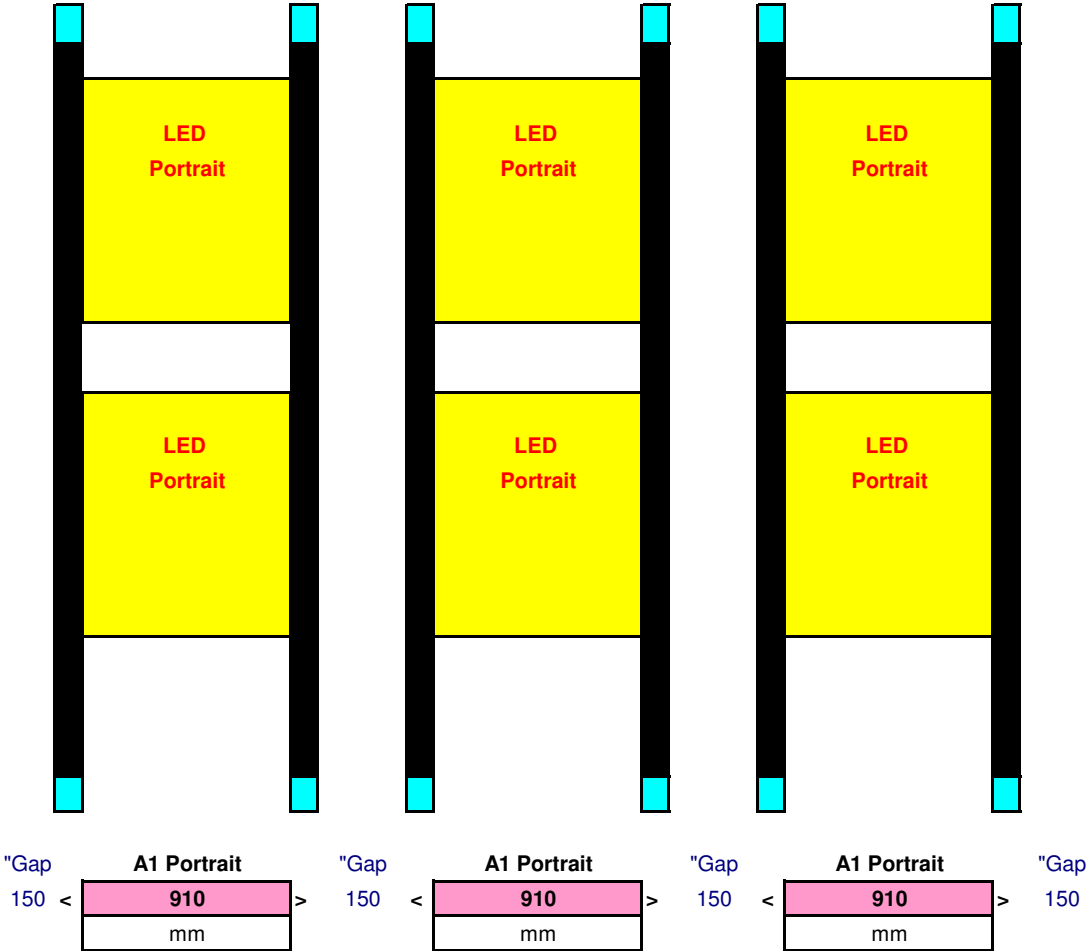


1x Drop	Widths
LED Hardware =	910 mm
2x End Gaps	300 mm
Central Gap (None)	0 mm
Total Space = 1210 mm	

2x Drops	Widths
LED Hardware =	910 mm
LED Hardware =	910 mm
2x End Gaps	300 mm
1x Central Gap =	150 mm
Total Space = 2270 mm	

3x Drops	Widths
LED Hardware =	910 mm
LED Hardware =	910 mm
LED Hardware =	910 mm
2x End Gaps	300 mm
2x Central Gaps =	300 mm
Total Space = 3330 mm	

Note:
Due to weight of each LED (25kgs)
Rods are utilised instead of cables
Each drop will come with 4x 1500mm Rods
LED Grippers, will also be Rod Grippers

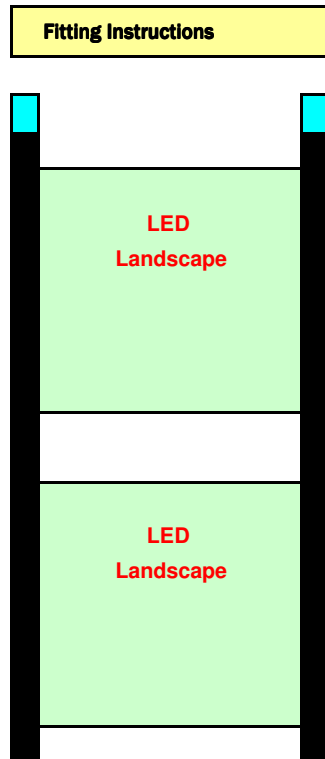

Step 1:

1. The most important aspect of these displays is the ceiling fitting
2. Always ensure a true solid anchor on the ceiling area
3. Never anchor to a metal beam (due to the utilised Power Transformer)
4. If you have a metal beam - always attach a wooden baton to the metal beam

Step 2:

1. Measure the distance from the left & right grippers on your LED
2. Now secure both Rod Holders to your ceiling, with the true measurements
3. Best fitting in a mid-flight-finish (rod not going to the floor)
4. *First decide what mid-flight length is required....*
5. *OK with that height, join 2x 1500mm rods together, and cut, out what is not wanted*
6. *Now slide LED 1 - Onto the 2x suspended rods (keeping the "+" on the left)*
7. *Now repeat for LED 2 - but, leave a generous gap between each LED*
8. *At this point you should have either 1 or 2x LEDs supported between the rods*

Step 3:

1. Now secure the 2x Power Adaptor connectors, to each rod - at the ceiling area
2. Once added, now introduce the power cables from the supplied Power Adaptor
3. Now - ideally add a 'Power Surge Protector
4. Now plug the plug into the surge protector - & finally turn on the power

Not Working?

1. Common reason is you have the LED "+" - NOT on the left side (ensure it is)
2. Common reason is you have the "+" adaptor cable on the wrong side (ensure it is)
3. Common reason, the power socket is not turned on (turn it on)

Other Reason:

1. Power Transformer has gone wrong - **long term!**
2. This maybe the power transformer is failing - or - burnt out - or - simply broken etc
3. Solution - purchase a brand new 60W Power Transformer